



# Ball valves Type GBC




REFRIGERATION & AIR CONDITIONING DIVISION



### GBC: excellent mounting and service

GBC ball valves are manually operated shut-off valves suitable for bi-directional flow. Ball valves are used in liquid, suction and hot gas lines in refrigeration, freezing and air conditioning systems. The GBC bi-directional ball valves can be delivered with or without external access port. The valves have one-piece wire seal cap to prevent unintentional cap removal or tampering between services.

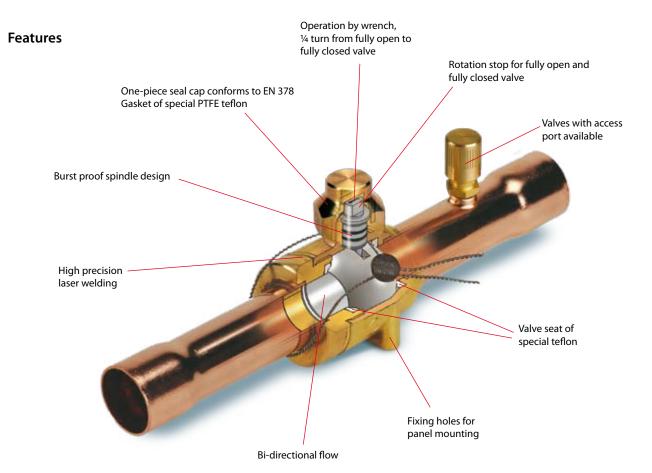

#### **Applications Advantages Facts** GBC valves are used in liquid, suction Full flow with minimum pressure drop. · GBC can be used for all fluorinated and hot gas lines in all refrigeration Bi-directional flow, i.e. valve orientarefrigerants (CFC, HCFC and HFC). and air-conditioning systems with tion is unimportant. · Temperature range: fluorinated refrigerants. Slimline design ensures easy opera--40 to +150°C tional handling. Max. working pressure (PS/MWP) Burst proof spindle design prevents 45 bar (650 psig). liquid from being trapped internally. · Test pressure: 65 bar (940 psig). Valve seat of special teflon to secure · Approvals: UL, CSA and CE. maximum tightness and a long lifetime. The available access port saves money if service of the system is necessary.

# Technical data and ordering



#### Standard valve

Туре	Solder ODF connection		Solder ODF connection		k <sub>v</sub> value 1)
	in.	Code no. 2)	mm	Code no. 2)	m³/h
GBC 6s	1/4	009G7020	6	009G7030	2.0
GBC 10s	3/8	009G7021	10	009G7031	5.7
GBC 12s	1/2	009G7022	12	009G7032	10.6
GBC 16s	5/8	009G7023	16	009G7023	14.1
GBC 18s	3/4	009G7024	18	009G7035	20.4
GBC 22s	7/8	009G7025	22	009G7025	28.2
GBC 28s	11/8	009G7026	28	009G7033	52.0
GBC 35s	1 <sup>3</sup> / <sub>8</sub>	009G7027	35	009G7027	80.9
GBC 42s	1 <sup>5</sup> /8	009G7028	42	009G7034	121
GBC 54s	2 <sup>1</sup> / <sub>8</sub>	009G7029	54	009G7029	225
GBC 67s	25/8	009G7036			246
GBC 79s	31/8	009G7037			223

#### Valve with access port

Туре	Solder ODF connection		Solder ODF connection		k <sub>v</sub> value 1)
	in.	Code no. 2)	mm	Code no. 2)	m³/h
GBC 6s	1/4	009G7050	6	009G7060	2.0
GBC 10s	3/8	009G7051	10	009G7061	5.7
GBC 12s	1/2	009G7052	12	009G7062	10.6
GBC 16s	5/8	009G7053	16	009G7053	14.1
GBC 18s	3/4	009G7054	18	009G7065	20.4
GBC 22s	7/8	009G7055	22	009G7055	28.2
GBC 28s	1 <sup>1</sup> /8	009G7056	28	009G7063	52.0
GBC 35s	1 <sup>3</sup> / <sub>8</sub>	009G7057	35	009G7057	80.9
GBC 42s	15/8	009G7058	42	009G7064	121
GBC 54s	21/8	009G7059	54	009G7059	225
GBC 67s	25/8	009G7066			246
GBC 79s	31/8	009G7067			223



 $<sup>^{\</sup>rm D}$  CFD calculated values (Computational Fluid Dynamics)  $^{\rm D}$  Code numbers in bold are normally on stock and a shorter delivery time can, therefore, be expected.





GBC valve with access port




## Quality in everything we do

GBC ball valves are part of the Danfoss line components program which covers a wide range of components used in refrigeration systems. Our production utilises state-of-the-art technology and every product is thoroughly tested in accordance with the most demanding standards.

If the component you are looking for is not mentioned in this leaflet or if you have special requirements, Danfoss partner wholesalers or our local Danfoss team can offer you help and guidance and will do their utmost to fulfill your needs.

#### **Related products**

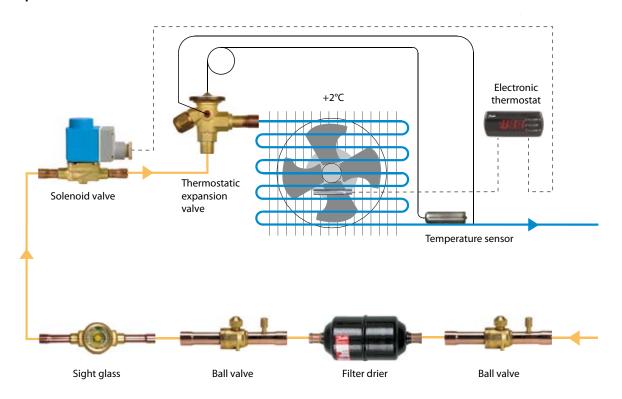

#### The Danfoss line components program



Danfoss Ltd. • Capswood, Oxford Road, Denham • Bucks UB9 4LH • Tel: 0870 241 7041 • Fax: 0870 241 7045 • uk.refrigeration.sales@danfoss.com • www.danfoss.co.uk

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed.

All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.